



Amelar
Communications
Incorporated

News


For Immediate Release

5 Fir Court
Oakland, NJ 07436
201-337-0099
Fax 201-337-4545
PR@amelar.com

STAR-6180

Agency Contact: Ron McGee

Lined Visual Flow Indicators Resist Corrosive Chemicals

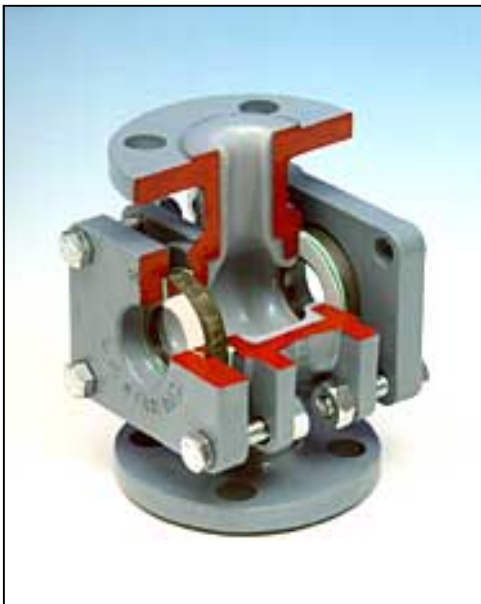

Designed to handle a wide variety of common corrosive chemicals, the new lined L.J. Star visual flow indicators are offered in both Teflon® PFA and Tefzel® models. These new flanged units provide clear viewing and dependable service even at high pressures and at temperatures up to 500°F. Also, for particularly demanding applications, glass shields of FEP®, KEL F® or mica are available as an option.

Six sizes of these new lined visual flow indicators are available, ranging from 1 inch to 6 inches. A user can select either 150 psi or 300 psi versions, and models that incorporate drip tube or flutter flow indicators are also available. All models

are full ANSI rated and feature ultra-sturdy investment cast bodies fitted with independently bolted glass retainers.

Standard material of construction is acrylic-enamel coated carbon steel but, for especially aggressive environments, stainless steel can be specified. Standard seal gasket is Teflon with other materials as options.

For additional information, contact L.J. Star Incorporated, P.O. Box 1116, Twinsburg, OH 44087. Phone: 330-405-3040. Fax: 330-405-3070. Email: view@ljstar.com. Web site: www.ljstar.com

Prefer Digital Files? – Email PR@amelar.com and specify release #6180